

## 550s






550Kg Lifting Capacity At 1M
2.5 Metre Full Extension
225Kg Lifting Capacity At 2.5M
Emergency Stop
Slew Operator Protection
Hose Burst Protection
Valve Control Guard
Load Indicator
Compliance - AS1418-11-2014


Flexible Mounting Options
Purposely built for the Australian Market
National and International Dealer Network
Specialised Attachments Avaliable
Proudly Australian Made
2 Year Warranty
5 Year Limited Warranty



## KEVREK 550s **CRANE SPECIFICATIONS**

## **TECHNICAL FEATURES:**





Capacity Class Maximum Lift Capacity Standard Outreach With Additional Boom Lifting Height Above Base Standard With Additional Boom Outreach/Lifting Capacity

Slewing Torque Slewing Angle **Pump Capacity** Oil Tank Volume Working Pressure Power Consumption

0.56Tm (5.49 kNm) 550kg @ 1.035m Radius 2.52m N/A 3.25m N/A 1.03m - 550kg 1.78m - 330kg 2.52m - 225kg 1.5 kNm 290° 4.9 > 7.01/min

1750 PSI (120 BAR) 12 volt - 50 > 150 amp 24 volt - 50 > 90 amp


3.01

Weight Inc/Power Pack And Oil 125kg Weight - Manual Leg C/W Motor Mount and Storage Mount 14kg Height Folded 1057mm

## **Options:**

MOUNTING BASE PATTERN

- Radio Remote Control
- Manual Swing Up Leg
- Hydraulic Leg
- Multiple Function Pendant Control

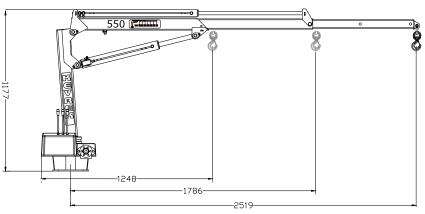

The Australian Lifting Solution



2M . 1035mm 1785mm 330 KG 2520mm 225 KG -1M ЗМ

156 Beringarra Ave, MALAGA WA 6090 email: kevrek@kevrek.com.au

website: www.kevrek.com.au

Ph: (08) 9248 5922 Fax: (08) 9248 5966